

FREE CUTTING Series Specification



C6240

24V-8mm





【General description】

- 7-Year warranty indoor,5-year warranty outdoor.
- 2-in-1 functionality: free cutting and high efficiency,reduce stock.
- High LEDs density for linear light.
- Self-encapsulated KSF 2216 LEDs,customized big 24V chips.
- With life span over 84000H
- Ta: -25~40°C; Tc: 75°C(max)
- UL/UACK/CE/ROHS/REACH certification

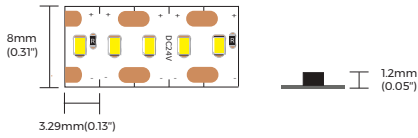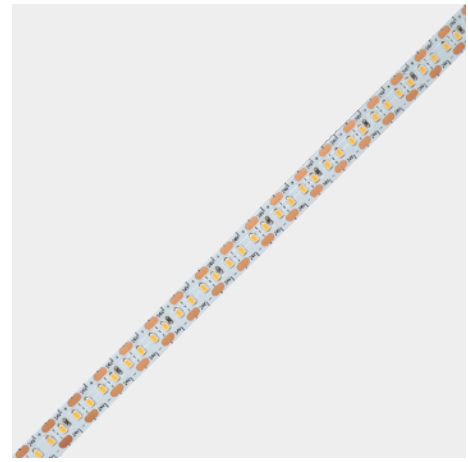

【Dimension】

- Input voltage: DC24V
 CRI: 90
 Max.power: 15.8W(1m)
 Power range:13~15.8W(1m)
 Rated current: 0.6A(1m)
 Typical Power: 14.4W(1m)
 tape IP: IP20/IP65/IP67
 On-off times: 10000 (test times)
 Warranty: 7 years indoor / 5 years outdoor
- Max.length: 5000mm(16.4')
 Cutting unit: 1leds/4.16mm(0.16")
 LED pitch: 4.16mm(0.16")
 Min. bend diameter: Φ 60mm(2.36")
 Mounting: 3M tape
 Copper foil: 3oz




· Photometric of 1M strip

· AAI Figurestrip


【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	LW	2300K	1770	539	123	E
Ra>90	SW	2700K	1800	548	125	E
Ra>90	WW	3000K	1870	570	130	E
Ra>90	PW	3500K	1915	600	133	E
Ra>90	NW	4000K	1930	588	134	E
Ra>90	W	6000K	1860	567	129	E

- 1.The tolerance of output data can be vary up to 10%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

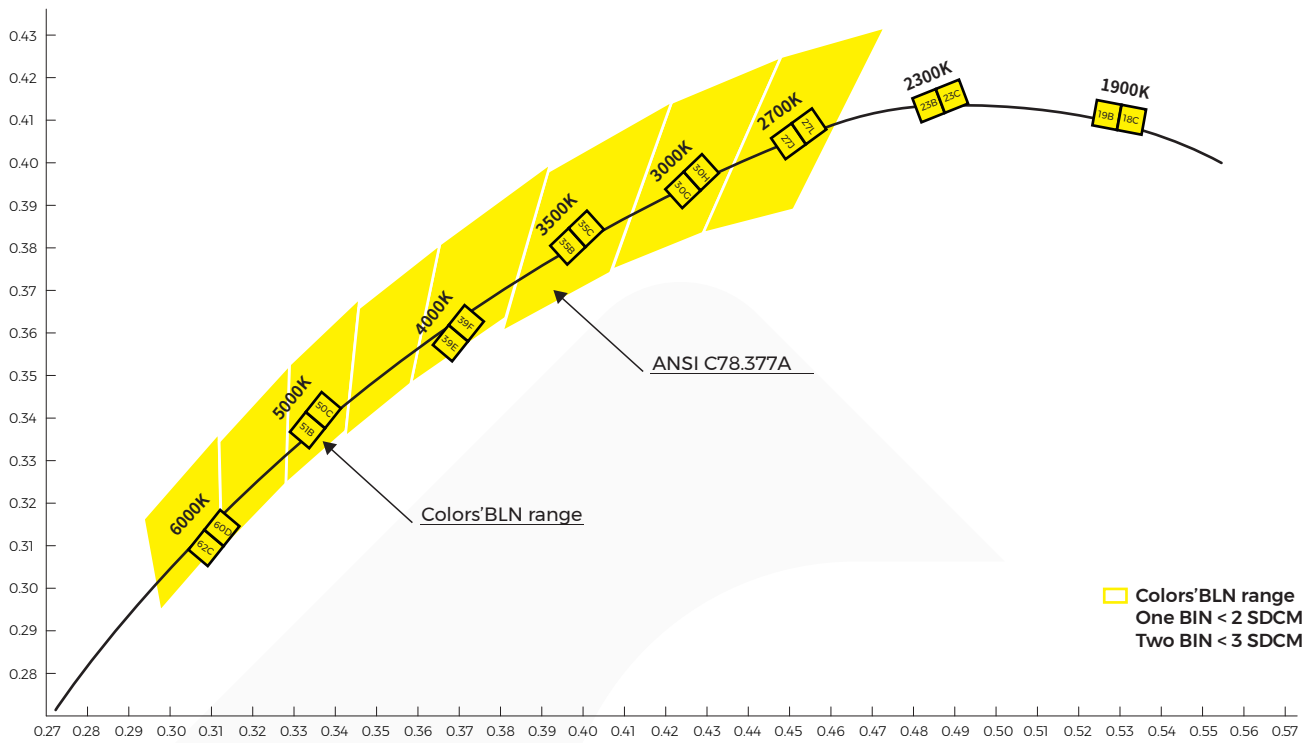






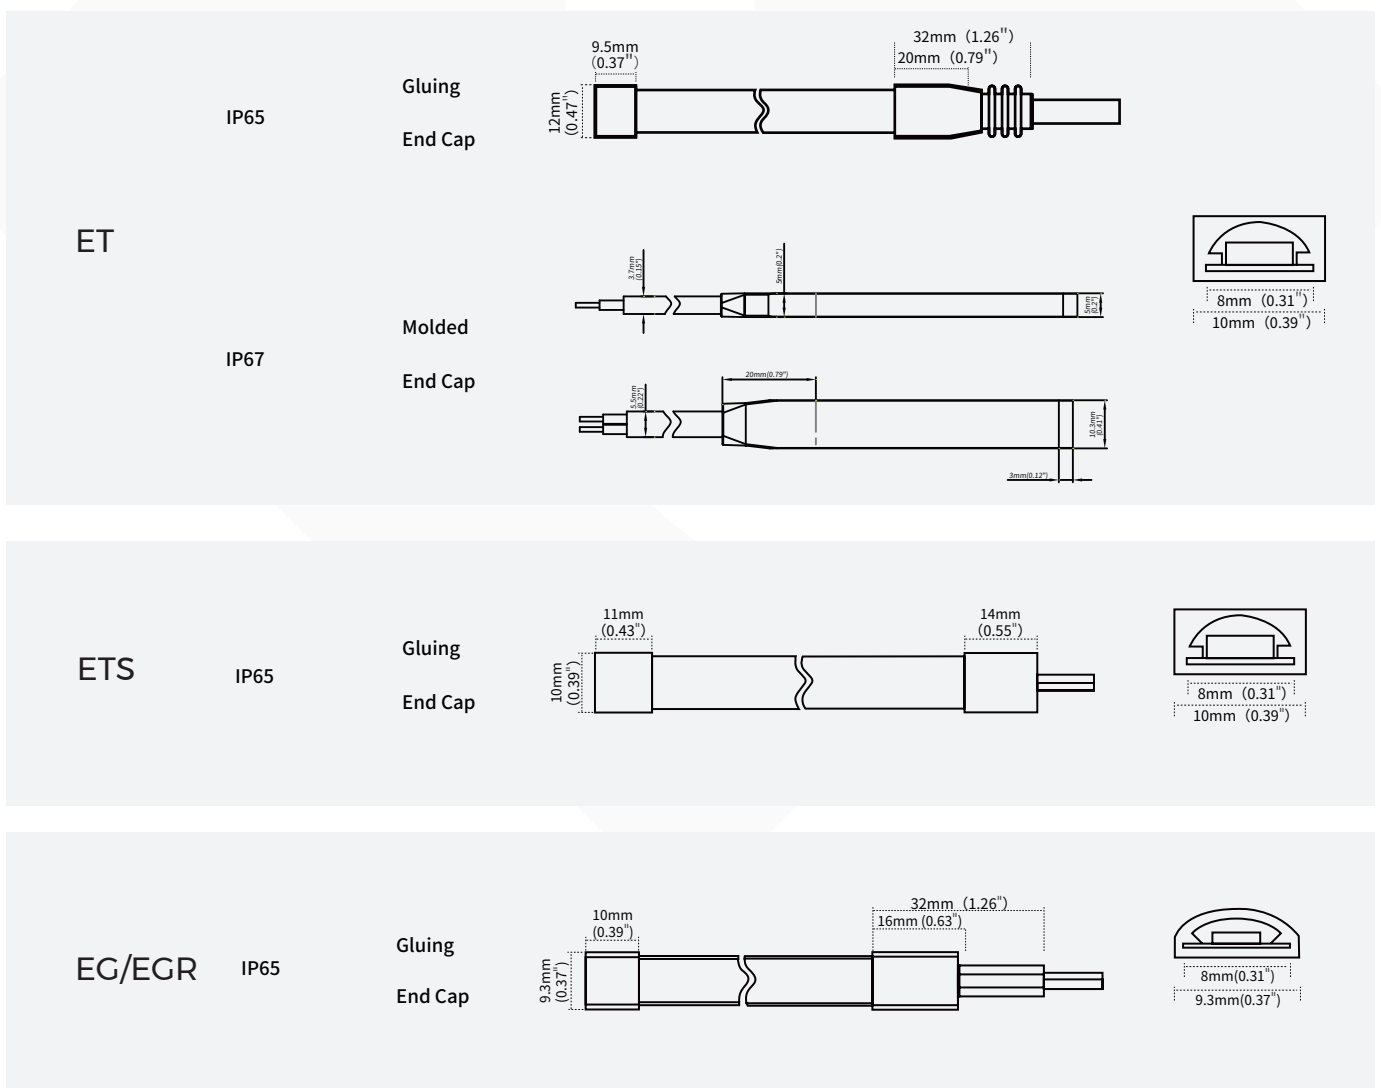【IP process information】














Remark: IP20 strip have two kinds of wire, PVC wire is used for UL strip , and parallel wire is used for non-UL strip.

【Electronic & output data】


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	8mm*1.2mm	2300K/2700K/3000K/3500K/4000K/6000K	100%
NA		Nano-proof	8mm*1.2mm	2300K/2700K/3000K/3500K/4000K/6000K	98%
ET		Extrusion tube	10mm*4.8mm	2300K/2700K/3000K/3500K/4000K/6000K	88%
ETS		Extrusion tube	10mm*4.8mm	2300K/2700K/3000K/3500K/4000K/6000K	88%
EG		Extrusion curved tube	9.3mm*3.8mm	2300K/2700K/3000K/3500K/4000K/6000K	88%

【Accessories Information】


Name	Picture	Code	coding	description
Fixed Clip		94-02-00-0002	FSW08SA	Silicone clip, screw: PA 3*8mm, suitable for 8mm FPC,EF/ET strip
ET press-fit terminals		94-03-00-0027	PT208-ETWA	Monochromatic light strip, 8mm board width, ETS protection technology
ET press-fit terminals		94-03-00-0028	CBX208-ETWA020	Monochromatic light strip, 8mm board width, ETS protection technology
ET press-fit terminal kit		94-03-00-0029	STBX208-ETWA020	Monochromatic light strip, 8mm board width, ETS protection technology
Silicone Plug Kit		94-02-00-0044	DT08EA-A	Silicone plug kit, suitable for 8mm board width, ET/EF series silicone extrusion light strip
Silicone stopper kit		94-02-00-0045	DW08EA-A	Silicone tail plug kit, suitable for 8mm board width, ET/EF series silicone extrusion light strip
Mounting groove		94-02-00-0024	CVT08EA-12100100	Transparent PVC mounting groove, suitable for 8mm FPC, silicone extruded EF/ET strip
Stopper glue		94-16-03010001	AS-PG-0003	Silicone gel, suitable for ET/EF/EG waterproof LED strip
Connector for wire and FPC		/	CXB208-DFTA	2PIN, wire to board (without wire), suitable for 8mm single color IP20 strips
Connector for FPC and FPC		/	CBB208-DFTA	2PIN, board to board, suitable for 8mm single color IP20 strips
L-connector for FPC and FPC		/	CBBL208-DFTA	2PIN, board to board (L shape), suitable for 8mm single color IP20 strips

【Packing】

Colors brand package

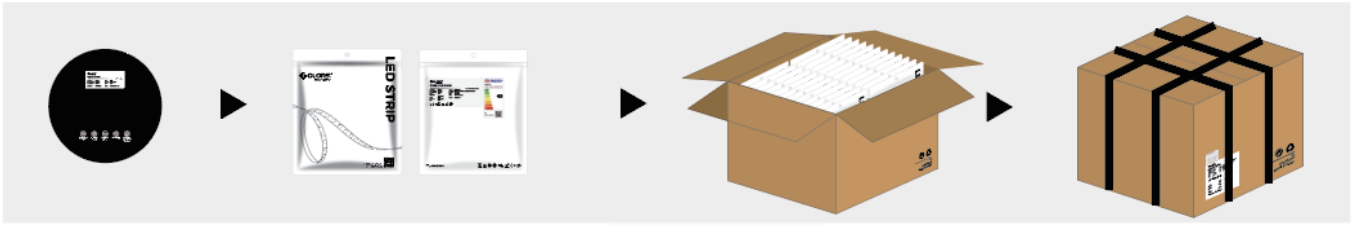

General customized package

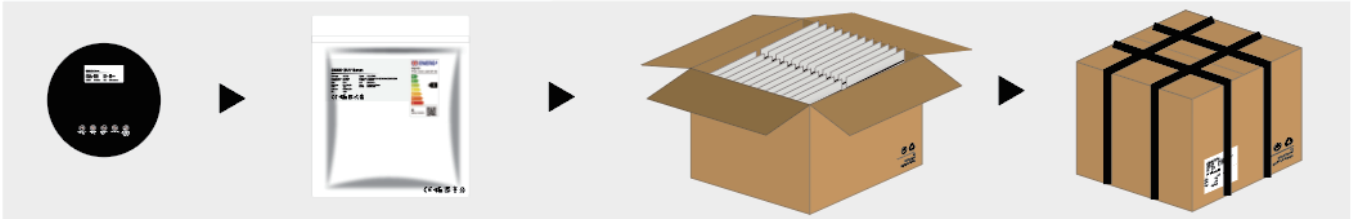


IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*8*1.2	5	300	0.135	8.1	9.315	41*41*26
NA	5000*8*1.2	5	300	0.137	8.22	9.453	41*41*26
ET	5000*10*4.8	5	200	0.46	18.4	21.16	41*41*26
ETS	5000*10*4.8	5	200	0.45	18	20.23	41*41*26
EG	5000*9.3*3.8	5	200	0.2	8	9	41*41*26

Remark: data with 10% tolerance

· Engineering packaging of ET(IP67)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

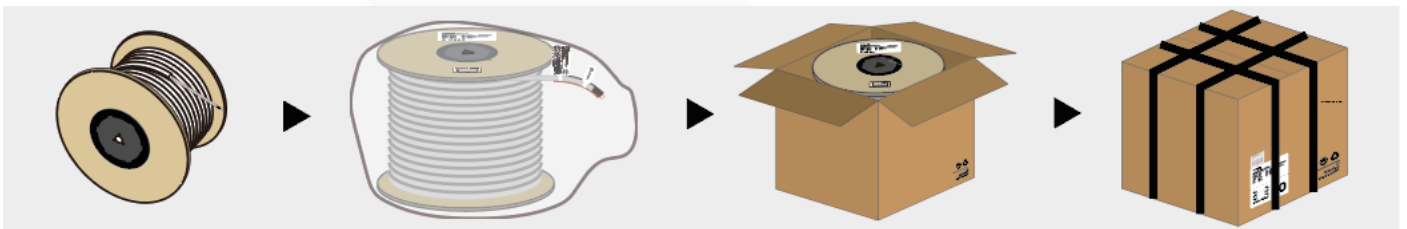

· Engineering packaging of NO(IP20)/NA(IP65).



IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	50000*8*1.2	50	650	1.35	17.55	20.182	41*41*26
NA	50000*8*1.2	50	650	1.37	17.81	20.481	41*41*26
ET	50000*10*4.8	50	100	4.7	9.4	10.81	25.5*25.5*26
ETS	50000*10*4.8	50	100	4.7	9.4	10.81	25.5*25.5*26
EG	50000*9.3*3.8	50	100	2.1	4.2	4.7	25.5*25.5*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃. Storage temperature: 0℃~60℃. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.